

Design and Implementation of Secure Low Cost AMR system using GPRS Technology

Alauddin Al-Omary+

Wael El-Medany

Sufyan Al-Irhayim

College of Information Technology, University of Bahrain

¹**Abstract** — This paper presents the design and implementation of a secure low cost Automatic Meter Reading (AMR) system that calculates and transmits the total electrical energy consumption to main server using General Packet Radio Service (GPRS) technology provided by GSM networks. The proposed AMR system consists of three main parts: Accurate digital meter, a transmission facility and the billing server. To make affordable AMR system a low cost off-the-shelf materials are used. Successful demonstration of the system prototype has made it possible to be implemented in the Kingdom of Bahrain and other Middle East countries on a larger scale for meter reading applications.

Keywords: AMR, GSM, GPRS, M2M

1. Introduction

Automatic meter reading, or AMR, is one of the latest Machine to Machine (M2M) applications that have a huge contribution to the vision of M2M. AMR [1], [3], [4], [5], [9], [15], [16], [17] is the technology of automatically collecting consumption, diagnostic, and status data from metering devices (water, gas, and electric) and transferring that data to a central database for billing, troubleshooting, and analyzing. This remote reading technique has many advantages. It saves utility providers the expense of periodic trips to physical locations for a meter reading. Billing can be based on near real time consumption rather than on estimates based on previous or predicted consumption value. It has also less contact with adverse elements (dogs, inclement weather, etc.). This timely information coupled with appropriate forecast analysis, can help both utility providers and customers to control the use and production of electric energy, gas usage, or water consumption value. AMR systems and devices covered in this paper are primarily used for measurement of electrical energy consumption.

2. Literature Survey

In order to overcome the problems of the traditional meter reading system, efforts are underway around the world to automate meter reading and to provide comprehensive information to the consumer for efficient use of the utilities [1], [2], [3], [4], [5]. Researchers proposed different implementation techniques. In [7] SMS-based Reconfigurable Automatic Meter Reading System is introduced. The work uses the GSM network to send ARM data. In [9] a secure and scalable automated meter reading is introduced. The work uses existing local ISPs instead of requiring its own set of proprietary communication infrastructure. The gateway node basically consists of an embedded microprocessor system, based on embedded Linux, and a modem.

In [11] remote real time automatic meter reading system that employs distributed structure based on wireless sensor networks, which consists of measure meters, sensor nodes, data collectors, server and wireless communication network. Similar work is introduced in [12] and [19]. These systems consist of measure

+Corresponding author. Tel.: +973-39932732 ; fax: +973-17449063
E-mail address: alomary@jtc.uob.bh

meters, sensor nodes, data collector (gateway), management centre (server) and wireless communication networks based on ZigBee communication network.

3. Limitations Of Existing AMR Systems

Existing and traditional AMR systems are typically based on centralized point-to-point modem or radio connections which have two essential disadvantages: no scalability and weak security. The central system that collects and processes all meter values needs a pool of modems (or comparable means of communication) for parallel access to as many meters as possible. This approach does not scale very well if hundreds of thousands of meters have to be read every 24 hours, a number that is reasonable when it comes to private customer meter reading. The radio based system, or even Internet-based systems have weak security since the radio system can be intercepted and the normal Internet protocol (i.e http) is not secure unless an alternative secured protocol such as https is used.

The price of AMR system is still at a level where it usually cannot be applied widely to all customers. The price of AMR is mainly determined by the costs of the hardware, the installation and the communication infrastructure and the running cost. The cost issue play a key factor in replacing traditional metering system with AMR system.

4. The Proposed Method

During the last few years, a few venture companies explored the potential of introducing AMR in the kingdom of Bahrain. Their effort was driven by the fact that number of households in Bahrain is manageable. However, the cost of replacing all electricity meters and the introduction of an overall management system was too high.

To introduce the concept of AMR in the Kingdom of Bahrain, a model of low Cost Wireless AMR using GPRS Technology has been developed. GPRS is quite often used for meters that need to transmit a lot of data or for meters that needs to communicate as a point to point link. In cases were a roll out is scattered over the region PLC cannot be used which results in a solution where the GPRS meter communicates directly with the central access server. Often this is called point to point so it is more secure than broadcast technique. It is also faster and is not sensitive for influences.

The desired AMR system has the following requirements:

- a. Scalability: It should be able to be used for ten meters as well as for hundreds of thousands of meters without altering the architectural principles.
- b. Security: It should be based on state-of-the-art security methods that offer confidentiality and integrity of the measurement data.
- c. Low-Cost: The cost of the system implementation should be reasonably low in order to be used for a large number of customers.

5. System Architecture

The proposed AMR system design consists of three main parts: Digital meter, a transmission facility and the billing server.

5.1 The Digital Meter Design

5.1.1 Design Assumption

Following assumptions are made in the meter design:

- I. The meter should satisfy Bahraini power systems requirements. It runs with 230V/50Hz supply.
- II. The designed meter had a single-phase system mainly due to the budget allocation. Nevertheless, the theory of implementing a three-phase is identical to a single-phase wireless automatic meter-reading system.
- III. The meter can handle maximum current of 60 A

5.1.2 Digital Meter Implementation

The meter is constructed using off the shelf components such as evaluation board (MCP3905A), a Microcontroller (PIC16F84A), and LCD (16*2).

The evaluation board is used to calculate the power by sensing the load that is connected to it. The PIC microcontroller is used to accumulate the consumed energy by saving the readings in the memory of the microcontroller. The LCD will display the reading in two lines.

5.1.3 The MCP390 Evaluation Board

The MCP3905 evaluation board was used to build Microcontroller-based digital energy meter. The MCP3905EV includes only the MCP3905 IC with jumpers to configure its inputs. The two prototype area, input and output, are left to the user to be designed according to the user requirements. Regarding the input prototype area, a current-sensing element, such as shunt resistor, has to be installed with the proper AC line and load connection to it. The shunt resistor is used to monitor the current in a circuit and translate the amount of current in that circuit into a voltage that can be easily measured and monitored.

5.1.4 The PIC Microcontroller

The PIC16F84A microcontroller is used in building the meter. PIC16F84A has 18-pin Enhanced Flash/EEPROM (8-BIT) and belongs to the mid-range family of the PICmicro® microcontroller devices. The microcontroller is used to store the ID number of the subscriber and also is used to continuously monitor the instantaneous Watt-Hour (WH) reading and calculate the accumulated KWH and store it in its EPROM. Therefore, a controlling program is needed to perform these tasks. The flow chart of the controlling program is shown in fig (1).

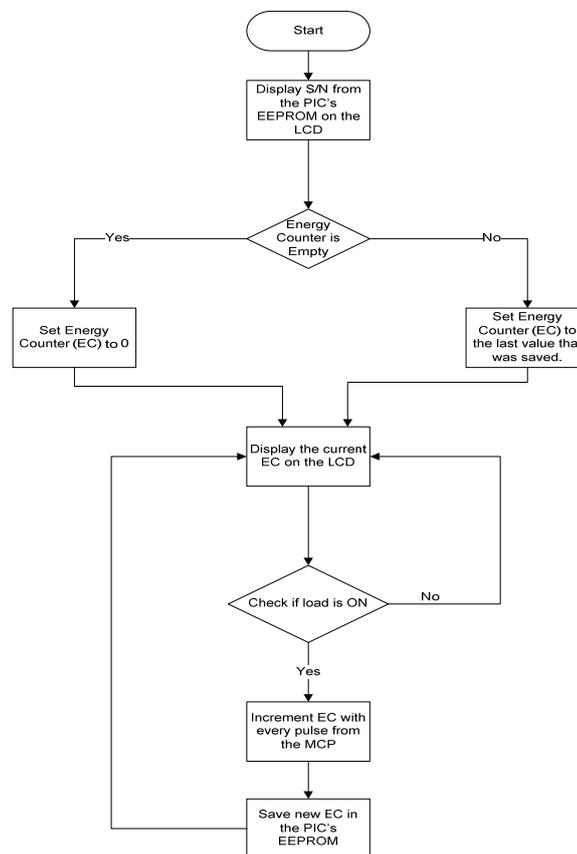


Figure (1) The Flowchart of the controlling program

5.1.5 The LCD Screen

A 16x2 LCD (2 lines with 16 characters per line) is used to display the meter reading. It contains two registers, data and command. Data register is used to send any type of data to the LCD. A command register is used to send addresses that initialize the LCD.

5.2 Transmission Facility

There are many different forms of communication links that can be utilized as the communication medium in an AMR system [16]. GSM network, with its vast coverage in most countries, and also its competitive ever-growing market, is becoming the main medium for the machine-to-machine applications, and AMR is not an exception. In this research the meter ID and its reading (KWH) are sent to a central server using General Packet Radio Service (GPRS) technology. GPRS is the technology used the GSM network to connect mobile to the Internet. The communication is done using GM862 cellular Quad band module and Quad-band wired Cellular Antenna SMA.

5.2.1 GM862 Cellular Quad Band Module

The GM862-QUAD modules are a product family that are easy-to-integrate GSM/GPRS modules for all industrial M2M applications. The GSM modem has quad band cellular capabilities (850 / 900 / 1800 / 1900MHz frequencies). GSM modules can be controlled via AT commands according to GSM 07.05, 07.07 and Telit Enhanced. It has an on board SIM holder to place the SIM card and also it has GSM antenna.

5.2.2 Quad-band Wired Cellular Antenna

A Quad-band antenna for embedded cellular devices is used to allow customer to connect his cellular module to the outside world. Operates on four frequencies and Comes with a 3M adhesive backing for mounting.

5.2.3 Security

Security is an important part of the data transmission process [8], [9]. GSM has a built in transport layer encryption, which is supported by most network providers. However, this encryption is commonly not used all the way, but only for radio transmission. As soon as the cable-bound GSM backbone is used, data is transmitted unencrypted. GPRS offers a number of security enhancements over existing GSM security. The standards themselves also offer technical features, which a network operator may choose to use. Aside of that, a different form of security might be desired in addition to the provided transport layer security. The key issue here is the distribution of keys between clients and data acquisition systems. It shall also be possible that different users such as utility companies and service providers use data originating from one cellular phone. The users shall not be able to read data that are not intended for them. This results in a sophisticated user structure that has to be reflected, for example, by having different keys available to communicate with different users.

5.3 The Billing Server

The collected power consumption reading is sent to the central billing server where it is stored. Many commercial servers as well as management software are available in the market. However the cost of such server and software management system are very expensive. To decrease the cost of the proposed AMR system, in-house software is developed using ASP.net and is used to control the central server. The implemented meter data management system will have the following functions:

- a) Remote metering: The meter reading is sent automatically to the server and customers can remotely get their consumption at any time.
- b) Bill issuing: The billing system shall provide monthly bill for customer who does not remotely access the server.
- c) Customer tracking: The billing should include better customer tracking, bill forwarding, identification of customer financial accounts information, and use of monetary deposits for account closing requirements.
- d) Apply different tariff for different customers: Houses, schools, factories are treated different and the bill should be calculated according to the corresponding tariff assigned by electricity authority in Bahrain.

5.4 Server Security

It is clear that the AMR system is n-tier enterprise architecture. Hence, general security requirements and planning applies for this system. Researchers in [20] present similar projects that can be used to design and implement such secure systems. The server in the billing office implements a highly secure tools which enabled only authorized staff members of the electricity supply company to work with collected data. These security tools will be used to attain confidentiality, integrity, availability and accountability (logging) of the AMR readings collection process.

6. Implementation and testing

The AMR system prototype has been successfully implemented and tested in the Department of Computer Engineering at University of Bahrain. Fig (2) shows the complete meter circuit.

The developed AMR system generate considerable interest by the Ministry of Electricity, and Water (MEW) for possible implementation in Bahrain where home privacy is important by the local people and entry of the meter-readers (mostly men) into their homes for recording utilities' consumption during day time, when men of the family are at work and only the women are at home, is not always welcomed. According to CTIA [18], the available scientific evidence does not show that any health problems are associated with using wireless devices. Therefore, use of wireless automatic meter reading is not expected to yield any negative health effects on the consumers.

The overall cost of AMR system (cost of the Meter and the GM862 CELLULAR QUAD BAND MODULE and not including the server cost) has been calculated to be about US \$250, which was within our budget range of US\$500.

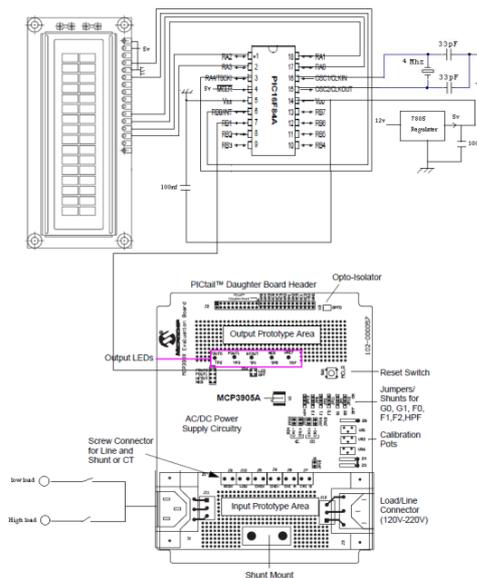


Figure (2) The meter circuit.

7. Conclusion

The design and Implementation of secure and low cost wireless AMR using GPRS technology had been presented. The AMR system consists of a meter; a GPRS based transmitter and a billing server. The low cost was achieved using off-the-shelf available components. The system security was achieved using the Smart Card that store encryption keys or use the crypto-co-processor of the SIM card. A billing server with meter data management system implemented using ASP.net technology. The implemented system is developed based on the Bahraini power systems requirements. A prototype of the system was developed and tested and proved to be reliable and secure. Successful demonstration of the system prototype has made it possible to be implemented in Bahrain on a larger scale for meter reading applications.

8. Acknowledgement

The authors like to thank the Deanship of scientific Research, University of Bahrain who supported this research (grant no. 43/2008). Many thanks to Maryam Al-Mutaw'a, A.Fattah matter and Mohammad Deeb for their help in implementing parts of the AMR system.

9. References:

- [1] Wikipedia Page. Retrieved 22/9/2010 from http://en.wikipedia.org/wiki/Automatic_meter_reading
- [2] T. Whittaker, "Final word," IET Control and Automation, Vol. 18, No. 3, June/July p. 48, 2007.
- [3] M. Venables, "Smart meters make smart consumers," IET Engineering and Technology, Vol. 2, No. 4, p.23, April 2007.
- [4] C. Brasek, "Urban utilities warm up to the idea of wireless meter reading," The IEE Computing and Control Engineering, Vol. 15, No. 6, pp. 10-14, December/January 2004/05.
- [5] Baker, M., "Added Value Services Through the Use of AMR in Commercial and Industrial Accounts", in Conference on Metering and Tariffs for Energy Supply, pp. 210-212, 25-28 May 1999.
- [6] Liting Cao Jingwen Tian Yanxia Liu , "Remote Wireless Automatic Meter Reading System Based on Wireless Mesh Networks and Embedded Technology," Fifth IEEE International Symposium on Embedded Computing, 2008. SEC '08, pp. 192 – 197, Oct, 2008.
- [7] Abdollahi, A. Dehghani, M. Zamanzadeh, N. , "SMS-based Reconfigurable Automatic Meter Reading System," IEEE International Conference on Control Applications (CCA 2007), pp. 1103 – 1107, Oct, 2007.
- [8] Sauter, T. and Palensky, P.: "Security Considerations for FAN-Internet connections"; 3rd IEEE Workshop on Factory Communication Systems, Barcelona, pp. 309-315, 2000
- [9] Peter Palensky and Gerhard Pratl, "Secure and Scalable Automated Meter Reading', Domestic Use of Energy conference 2003, pp. 233-236, 2003.
- [10] C. E. Ortiz and E. Giguere: "Mobile Information Device Profile for JAVA2 Micro Edition", Wiley, 2002.
- [11] Liting Cao Jingwen Tian Yanxia Liu, " Remote Real Time Automatic Meter Reading System Based on Wireless Sensor Networks", 3rd International Conference on Innovative Computing Information and Control, 2008 (ICICIC '08), pp. 591 – 591, Dalian, Liaoning, August 2008.
- [12] Gonzalo Álvarez, Hodei Cepeda, Igor Laniella, Nagore Benítez, Carlos Amuchástegui, "EMBEDDED SYSTEM FOR A WIRELESS AUTOMATIC METER READING MANAGEMENT", IADIS International Conference of Applied Computing 2007, pp. 777-780, 2007.
- [13][13] Radwan Tahboub, Dan Lazarescu, Vasile Lazarescu , "Modeling and Simulation of Secure Automatic Energy Meter Reading and Management Systems using Mobile Agents", International Journal of Computer Science and Network Security (IJCSNS), VOL.7 No.1, January 2007.
- [14] Raymond F. Ghajar*, Joseph Khalife, "Cost/benefit analysis of an AMR system to reduce electricity theft and maximize revenues for E´ lectricite´ du Liban", Applied Energy magazine, Vol. (76), pp. 25–37, 2003.
- [15] Jevgenij Tsoi, Device Management of Largescale AMR Systems, MSc thesis, Dep. Industrial Information and Control Systems, Royal Institute of Technology in Stockholm (KTH), Stockholm, Sweden 2006.
- [16] Cecilia Jägerlind, Improvements For The Automatic Meter Reading Process In Electricity Distribution Companies, Master Thesis, Dep. Industrial Info. and Control Systems, Royal Institute of Technology, Stockholm, Sweden 2006.
- [17] Nunn, C., Moore, P. M., & Williams, P. N., "Remote Meter Reading and Control Using High- Performance PLC Communication over the Low Voltage and Medium Voltage Distribution Networks", in 7th International Conference on Metering Apparatus and Tariffs for Electricity Supply, pp. 304-308, 1992.
- [18] CTIA page. Retrieved 22/8/2010 from http://www.ctia.org/consumer_info/safety/index.cfm/AID/10371
- [19] Tariq Jamil, " Design and Implementation of a Wireless Automatic Meter Reading System", Proceedings of the World Congress on Engineering 2008 Vol I, WCE 2008, July 2 - 4, 2008, London, U.K.